

Effect of the improved data acquisition system of IceCube on its neutrino-detection capabilities


Dmitry Chirkin¹ for the IceCube Collaboration²

¹Lawrence Berkeley National Laboratory, Berkeley, CA, U.S.A.

²see special section of these proceedings or [3]

Introduction

The ability of IceCube optical sensors to record information about all photons registered by their PMTs has not yet been fully utilized in the data analysis (see, e.g., [1]). While the much improved timing and energy resolution are being used to improve upon the energy resolution of the detected muon events [2], this contribution attempts to demonstrate the improvement in muon neutrino analysis due to the ability to separately detect individual photoelectrons with their respective times and charges.

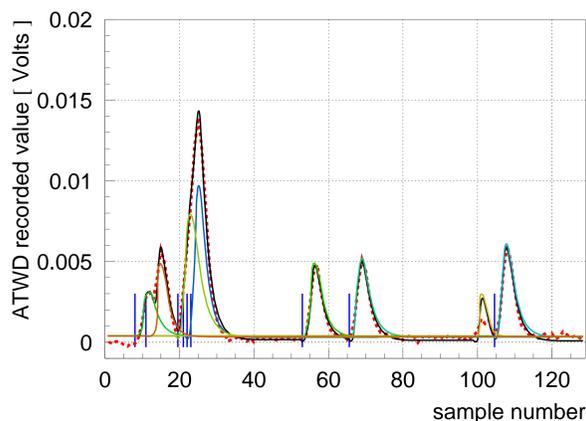

A typical PMT signal trace recorded by the faster digitizer of an IceCube optical sensor. The trace contains 128 samples, 3.3 ns. per sample. Results of 2 different photon deconvolution methods shown agree well. Blue vertical lines denote the hit times of the first method. The black fit line with colored lines denote deconvolved pulses of the second method. The data is shown with a red dashed line.


The goal of selecting muon neutrinos in the presence of a 10^6 times higher background of atmospheric muons is to maximize the signal yield at a low background level, while achieving the best possible resolution with least mis-reconstruction of signal events.

In this preliminary study we present the analysis of one month of data collected by a 9-string IceCube detector configuration in year 2006. Data reconstruction algorithms using only the first photon per sensor were compared with those incorporating the full multi-photon information. The angular resolution achieved in both cases is very similar; however, the number of badly mis-reconstructed signal events is lower for multi-photon reconstruction. Using the additional information available from all recorded photons leads to the correspondingly improved separation of signal and background and allows one to achieve the required background reduction while retaining a higher signal yield.

A new method of combining cuts to optimize background reduction is presented. First, a robust definition of angular resolution of reconstructed muon direction in simulated data is introduced. The cuts are optimized to maximize the angular resolution of the remaining events, and then are tightened to remove the background of misreconstructed events.

Atmospheric neutrino search

By applying successively stronger cuts corresponding to lower values of angular resolution α the background of misreconstructed downgoing events (that are reconstructed as upgoing) can be reduced until most of the events reconstructed as upgoing are, indeed, upgoing.

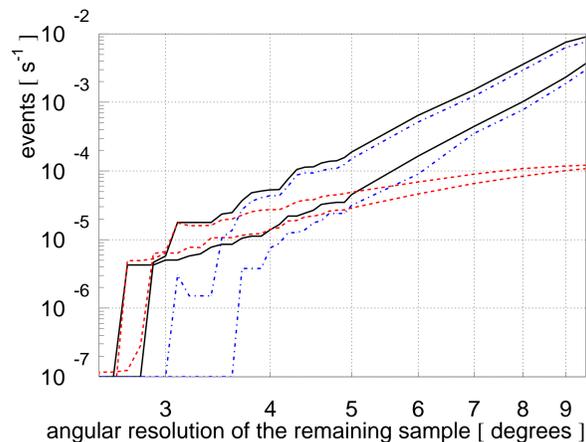

Events remaining at different cut levels corresponding to requested values of angular resolution α . Black solid: data; red dashed: muon neutrino simulation; blue dashed-dotted: background simulation. Upper curves are for the full cut set; lower curves are for the first-photon-only cut set.


Angular resolution and cut optimization

The precision of the track reconstruction methods is determined from the deviation of the reconstructed result from the true track direction from the simulation. It was not possible to describe all such distributions at different reconstruction quality levels with a single shape depending only on the distribution width. Therefore the following very general definition was introduced instead: the angular resolution α of a given simulated data sample is chosen so that 2/3 of the data have a reconstructed result deviating from the true track direction by less than the resolution, and 1/3 by more. This simple definition allows one to calculate the angular resolution α easily for all data quality levels, providing a good measure of the effectiveness of the quality cuts.

The cut parameters were chosen to have the following property: as the value of the cut on the parameter is lowered (i.e., the cut becomes stronger), the angular resolution α , as defined above, improves.


For each reconstruction several quantities (e.g., uncertainty in the reconstructed angles) have such "cut property". Parameters with similar distributions were grouped together, in each group the maximum value of the parameters in the group having been chosen as the parameter of the group.

Cuts c_i were applied to the parameter groups in such a way as to maximize the angular resolution α for each given fraction of events r left after the cuts. The fastest decent approach was chosen to optimize the cuts: starting with a full dataset, at each step reducing the fraction of the events left by the amount δr the cuts were adjusted by the amount proportional to $\partial\alpha/\partial c_i$.

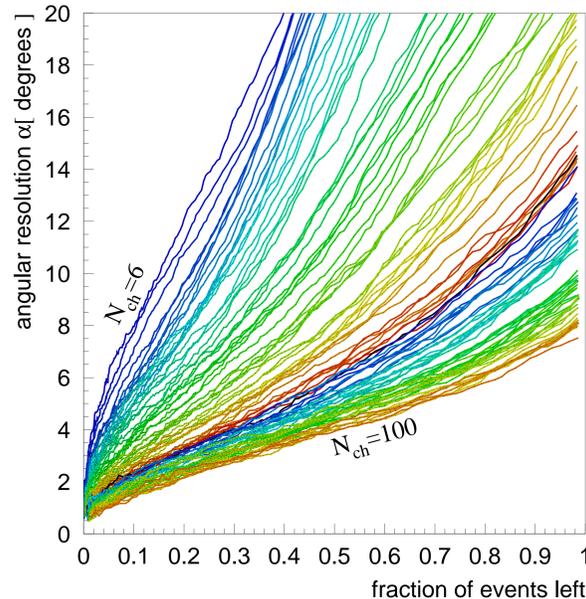


Efficiency matrix shows for each N_{ch} the best achievable angular resolution α at each given fraction of events left after applying cuts (this definition is equivalent to that given in the text).

The 50% purity is achieved at the intersection points of simulated background and neutrino lines: at angular resolution $\alpha=3.7$ with 96 events left for the full cut set, and at angular resolution $\alpha=4.9$ degrees with 90 events left for the first-photon-only data set. At the same signal purity level the angular resolution α of neutrino events in the remaining sample is 30% better for the full set. The angular resolution α and number of events left at $\sim 90\%$ purity level of 3.4 degrees and 46 events for the full cut set, and 3.6 degrees and 22 events for the first-photon-only cut set.

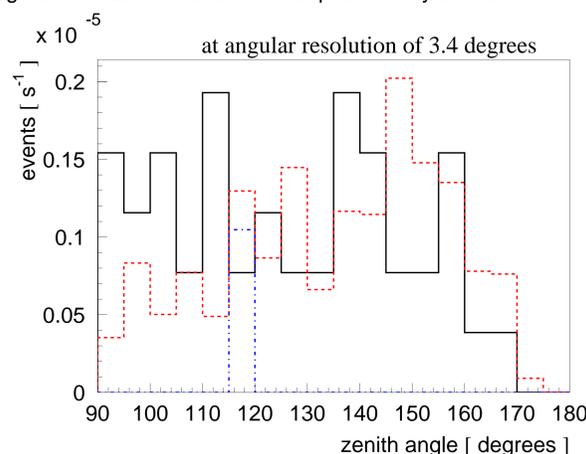


Zenith angle distribution at final cut level. Black solid line: data; red dashed: muon neutrino simulation; blue dashed-dotted: one event remaining from the background simulation.

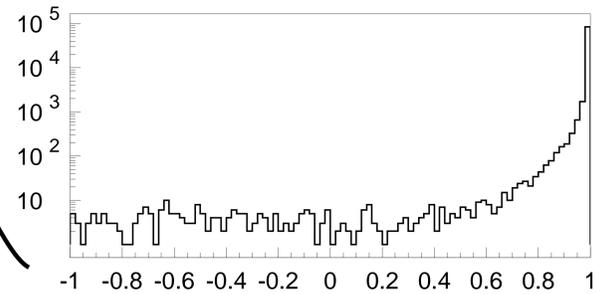

Distribution of the deviation of the reconstructed from the true direction for the studied simulated data sample shown after some cuts.

Since the relative and overall cut strength depends on the number of degrees of freedom available during the reconstruction, cuts were optimized individually for event groups with different number of sensors with signal (here called channels) N_{ch} from the simulated dataset. This resulted in a set of cuts, a representation of which, describing achievable efficiencies (fractions of events left, r_n) for given α and N_{ch} , is the efficiency matrix. In order to determine the cut sets needed to achieve a certain angular resolution α the efficiency matrix is consulted to determine the fractions of events r_n with given $n = N_{ch}$. The set of cuts strong enough to leave only a fraction r_n of events that were used in the efficiency matrix evaluation are then the cuts that reduce the data to a set with the desired angular resolution α .

To study the improvement in data analysis due to the availability of information about multiple pulses from each sensor the parameters corresponding to the multi-photon reconstructions were removed from the cut groups defined above.

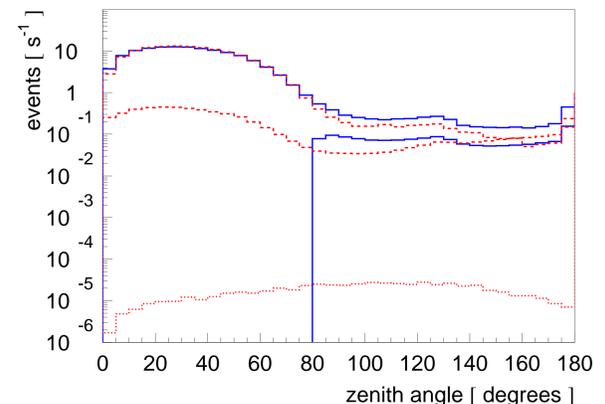

Initial zenith angle distribution (no cuts): red dashed lines: upper: downgoing muon background, lower: coincident downgoing shower background; red dotted line: muons from atmospheric muon neutrinos; upper blue line: reconstructed data; lower blue line: reconstructed data with cut of zenith angle above 80 degrees applied to all reconstructions.

Conclusions

A new approach to background rejection in IceCube is taken: instead of optimizing cuts to maximize signal over background, cuts are first optimized to maximize the angular resolution α of single muon tracks while retaining as many of the events as possible. Then the cuts corresponding to successively better values of angular resolution α are applied until the desired signal purity is achieved.

This approach allowed us to study the effect of including the complete information on all pulses recorded by the optical sensors of the detector. The number of signal events retained at the highest purity levels doubled (important for diffuse analysis), while the angular resolution α at somewhat relaxed cuts improved by 30%. We thank the U.S. National Science Foundation and Department of Energy, Office of Nuclear Physics, and the agencies listed in Ref. [3].

References

- [1] Pretz, J. for the IceCube Collaboration, these proceedings
- [2] Zornoza, J. for the IceCube Collaboration, these proceedings
- [3] Karle, A., these proceedings

for correspondence write to dchirkin@lbl.gov