



REV. L

-D (DOUBLE END)

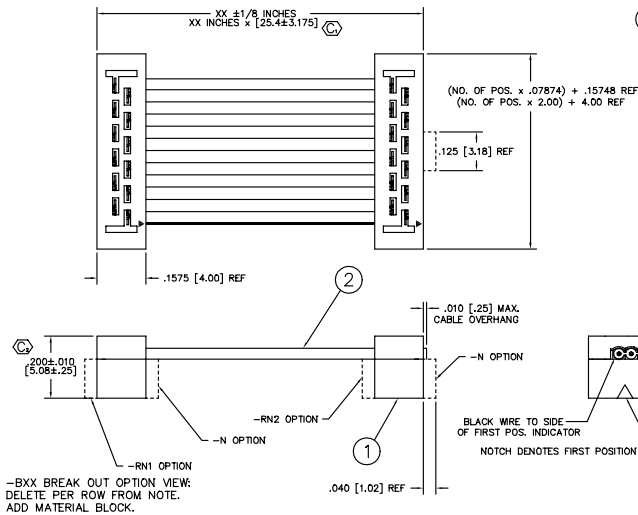

-S (SINGLE END)  
(SAME AS -D UNLESS OTHERWISE STATED)





NOTES:  
1. HIDDEN LINES ARE USED TO SHOW POLARIZATION WHEN USING -N OPTION.  
2.  $\odot$  REPRESENTS CRITICAL DIMS.

| TABLE 1      |        |
|--------------|--------|
| 1            | 2      |
| TCSD-XX-XX-X | TCB-50 |

SPECIFY NO. OF POS. IN PART CALL OUT -XX


| DIMENSIONS ARE IN INCHES      |  | UNLESS OTHERWISE NOTED           |  | TOLERANCES ARE                   |  | ANGLES        |  | TITLE: 2mm DOUBLE ROW FEMALE IDC ASSEMBLY |  | DWG NO: TCSD-XX-X-XX-01-XXX-XXX |  |
|-------------------------------|--|----------------------------------|--|----------------------------------|--|---------------|--|-------------------------------------------|--|---------------------------------|--|
| ONE PLACE DECIMALS: $\pm .1$  |  | THREE PLACE DECIMALS: $\pm .005$ |  | FOUR PLACE DECIMALS: $\pm .0020$ |  | $\pm 1^\circ$ |  |                                           |  | SHEET 1 OF 1                    |  |
| TWO PLACE DECIMALS: $\pm .01$ |  |                                  |  |                                  |  |               |  |                                           |  |                                 |  |

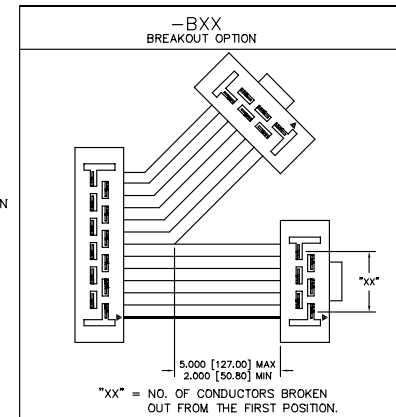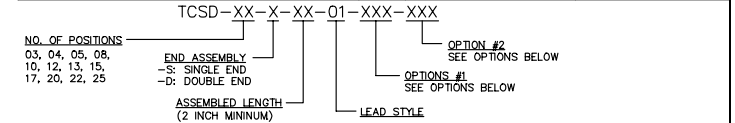


PLATING

-L: .000015 GOLD ON CONTACT AREA, TIN ON REMAINDER  
-F: .000003 GOLD ON CONTACT AREA, TIN ON REMAINDER  
(STANDARD PLATING IS .000030 GOLD ON CONTACT AREA, TIN ON REMAINDER)

-N  
NOTCH POLARIZATION




-P"XX"  
POLARIZED MATING




NOTE:  
THE SAME POSITION WILL BE POLARIZED ON BOTH ENDS. (USE PK-07)

-RW  
REVERSE WIRING




-RN1 OR -RN2  
REVERSE POLARIZATION NOTCH

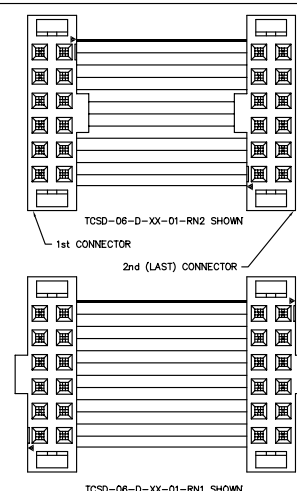


NOTE:  
-RN1 = REVERSE NOTCH ON 1st CONNECTOR ONLY. (NOT AVAILABLE WITH -R OPTION)  
-RN2 = REVERSE NOTCH ON 2nd CONNECTOR ONLY. (NOT AVAILABLE WITH -R OPTION)  
(REVERSE NOTCH NOT AVAILABLE ON ANY DAISY CHAIN OPTIONS)


-O  
OUTSIDE REVERSED

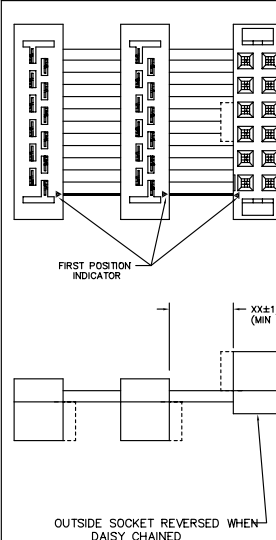


-M  
MIDDLE REVERSED

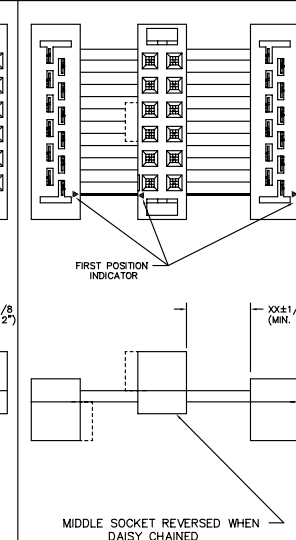

-R  
REVERSE CONNECTOR

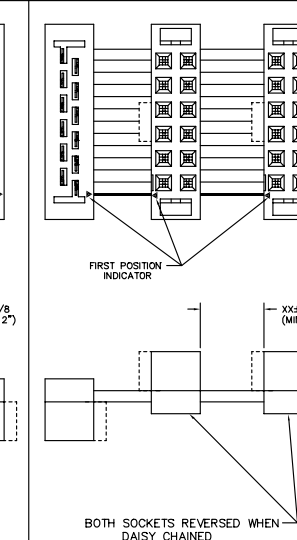

-D"XX"  
DAISY CHAIN-DOUBLE

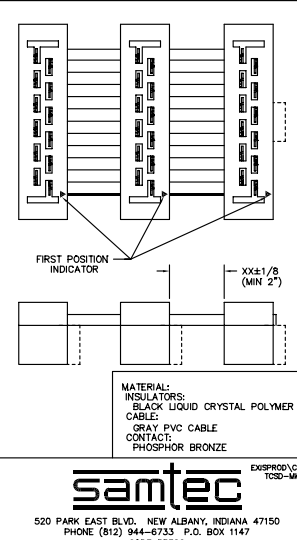

EXSPROD/CABLE  
TCSD-MK

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (317) 944-6733 F.O. BOX 1147  
CODE 55322

MADE BY: KOLB 4-29-92  
CHECKED BY: MCCARTIN  
DESIGN APPROVAL: DEM

TCSD-XX-X-XX-01-XXX-XXX  
SHEET 1 OF 1

PROPRIETARY NOTE  
THIS DOCUMENT CONTAINS INFORMATION OF A PROPRIETARY NATURE. IT IS THE PROPERTY OF SAMTEC INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN CONSENT OF SAMTEC INC.