



Suggested HV cable attachment (1)

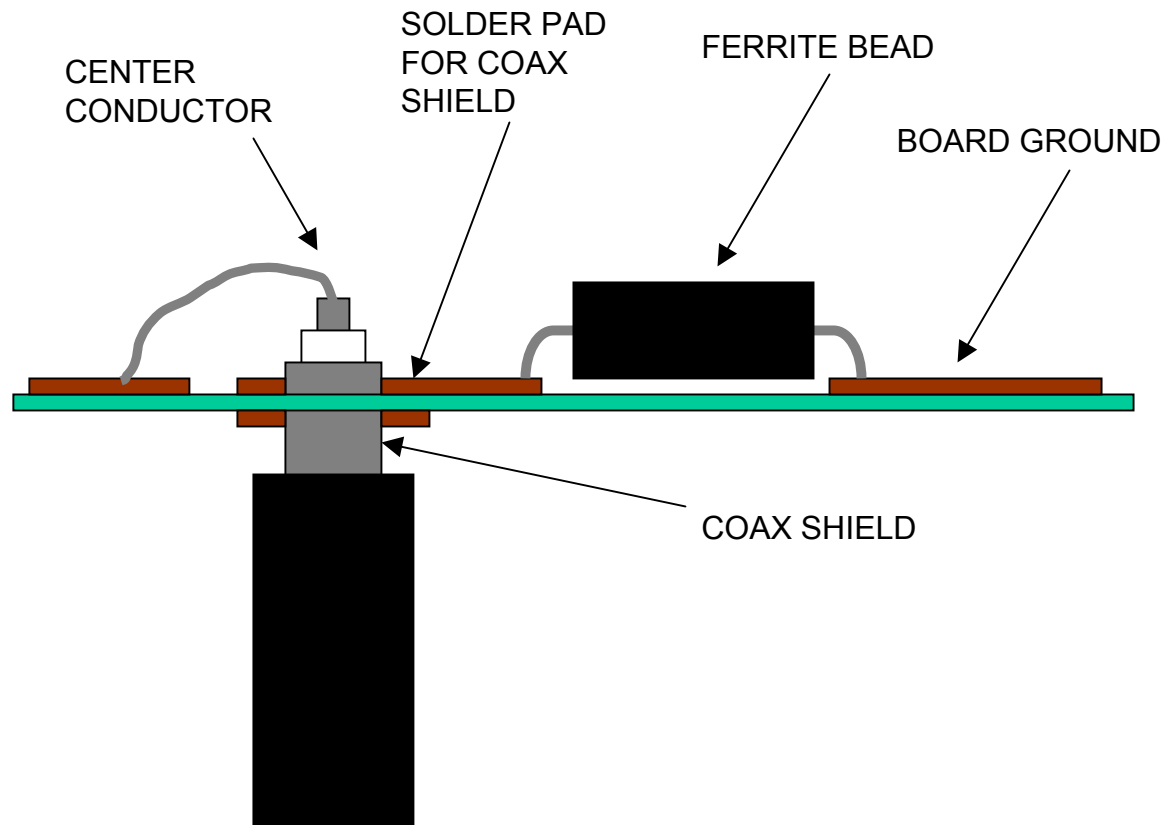


Suggested HV cable attachment (2)

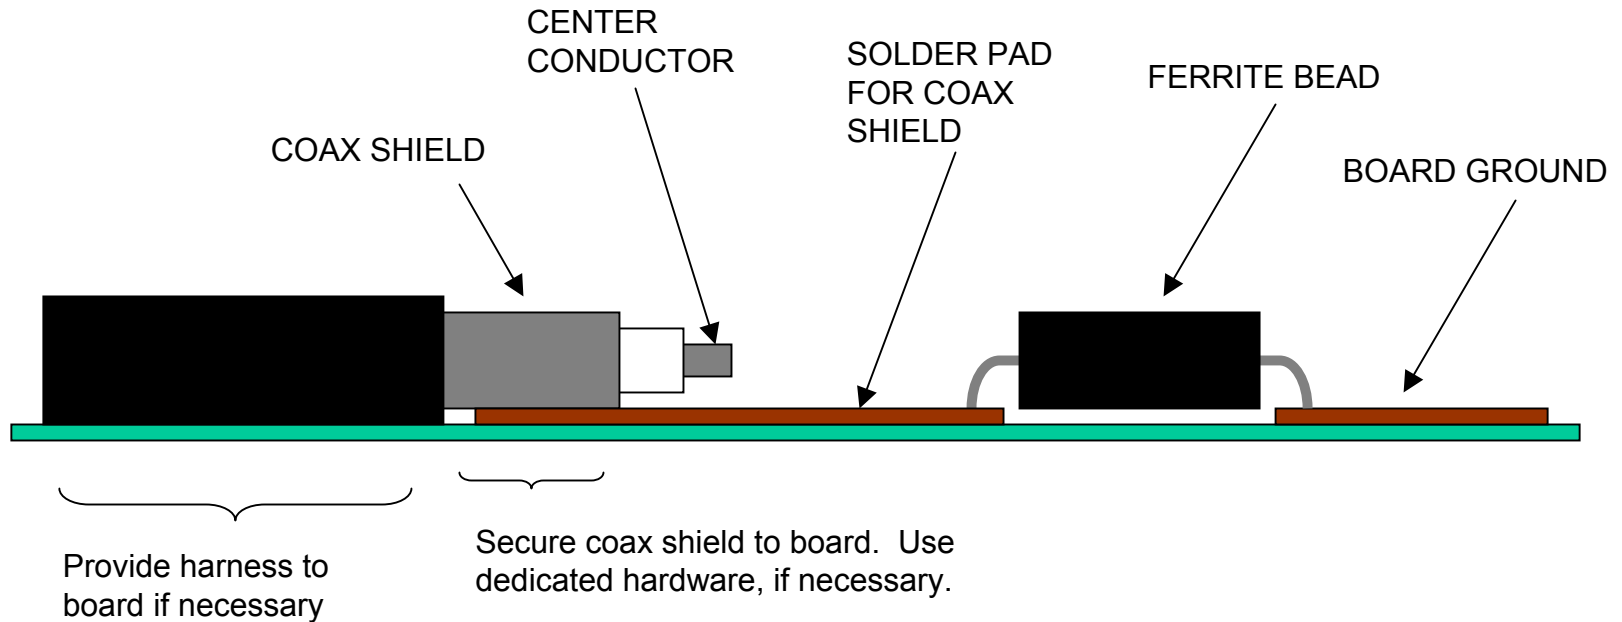

Requirements

- No strain on the center conductor regardless of the presence of additional harness mechanism.
- The ferrite bead shall have its own footprint.

The cable can be either side-entry or bottom-entry to the PCB.

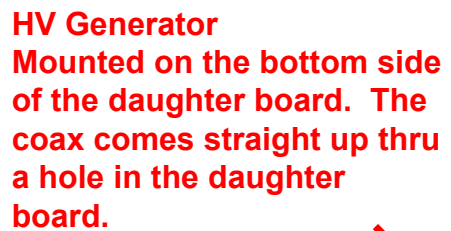


TOP VIEW

Portion of 5549B020 Rev F

Note: Ignore Drawing Rev E (Incorrect PMT pin locations)

Ice Top View = Board side away from PMT

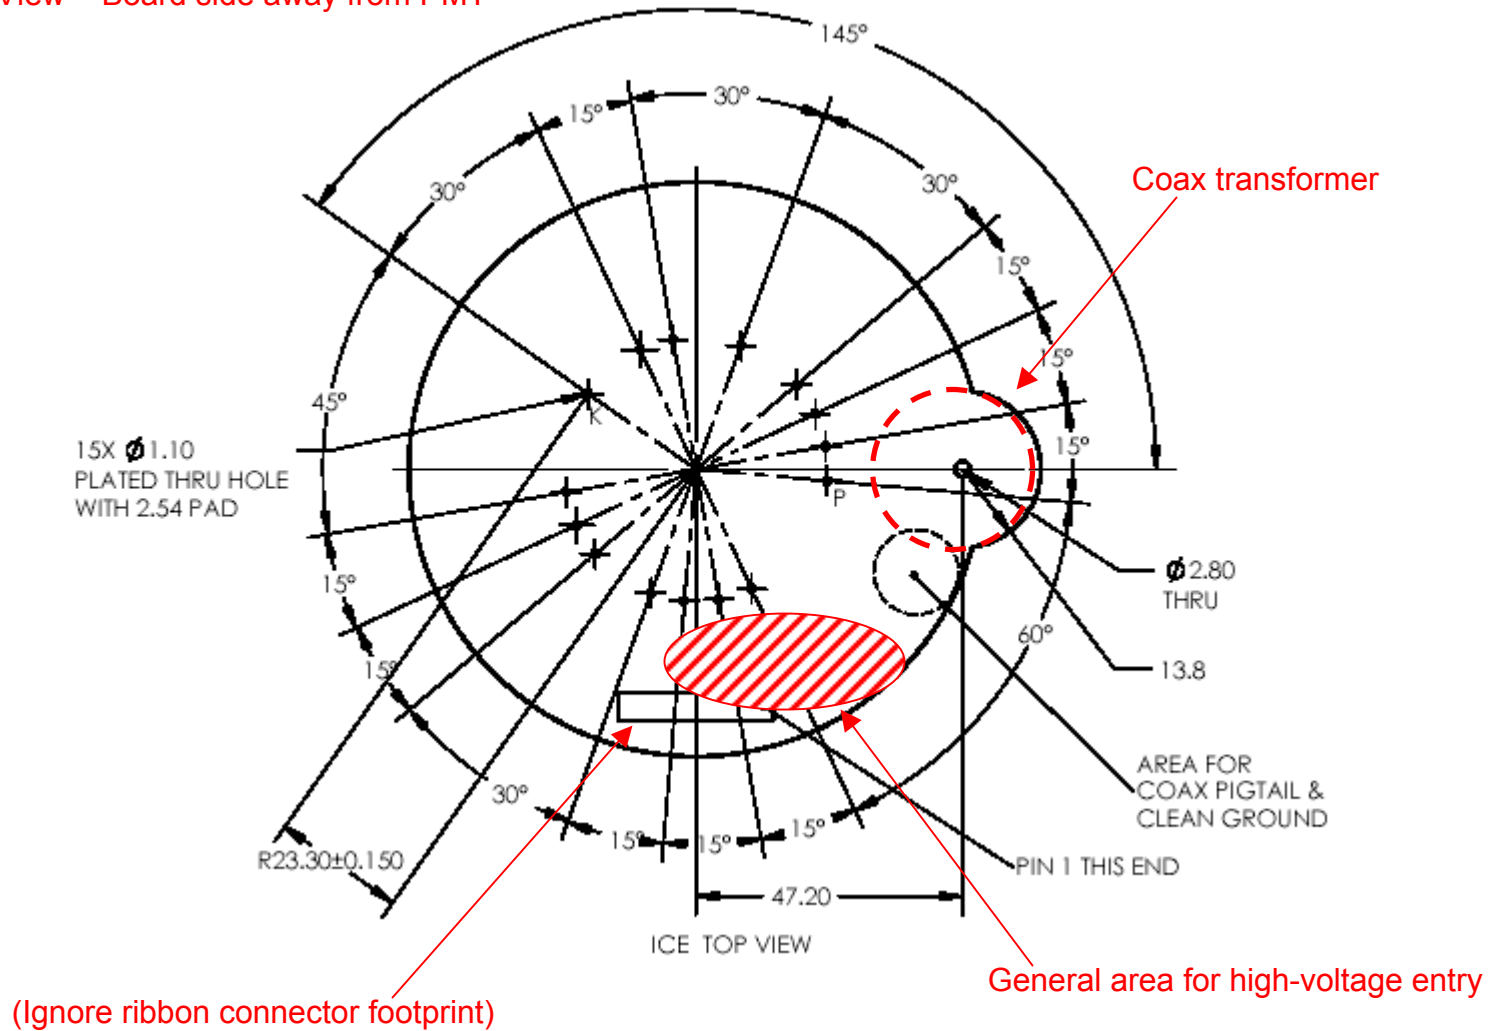

Side View

